










<div>  <h2>SLIM-CODEGUARD PROFESSIONAL CODE KEYPAD</h2> </div>		Export Product-list January 2018  TECNODIMENSIONE®	
<p>Programmable and modifiable without limitation and directly on the keypad in the field (using proprietary programming code, also programmable as desired in the field).</p> <p>Alphanumeric access code can be 2 to 8 digits long.</p> <ul style="list-style-type: none"> - With screw-type terminal box for conventional cables for connection to control panel (for independent use with any system also from different manufacturer). - 8 alphanumerical keys + Enter key for entering the codes.-2VDC/70 mA power supply. - NO → NC output contact (for code recognition), 12VDC/1A rating for door opening control, timed at app. 5 seconds. - 1 self-adhesive cover in polycarbonate, 180 x 30 mm R2,5 - thickness 0.3 mm, with international symbols, available in 7 colours - two-color R/G LED + buzzer to confirm the opening of the door. 		Ordering information 	Q.ty N°
Models for 12 VDC power supply		MODELS	
Assembly type 1 fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel * 	SLIM-CODEGUARD access code keypad type 1 with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6 mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining.	034991NM2U	
	Same with front panel and gap G for sections with a thickness of 3 mm.	034991NM2U3	
Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ♦ 	SLIM-CODEGUARD access code keypad type 2 for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish, 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.	034992NM2U	
Assembly type 3 for conventional flush mounting with front flange overlapping door frame 	SLIM-CODEGUARD access code keypad type 3 for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.	034993NM2U	
Assembly type 4 for surface mounting with using housing 	SLIM-CODEGUARD access code keypad type 4 for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.	034994NM2U	
Assembly type 5 for recessed wall-mounting with flange and wall-mounting receptacle 	SLIM-CODEGUARD access code keypad type 5 for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the access code keypad. Wall niche and cable channel to be prepared beforehand.	034995NM2U	

Special configurations available at extra charge: Cover with your logo and/or customized.


For sizes, measurements and details of chasing, application examples and connection diagrams, see page 68

SLIM-CODEGUARD KEYPADS - sizes, application examples and connection diagram


Assembly type ① total alignment, lock recessed into surface without flange

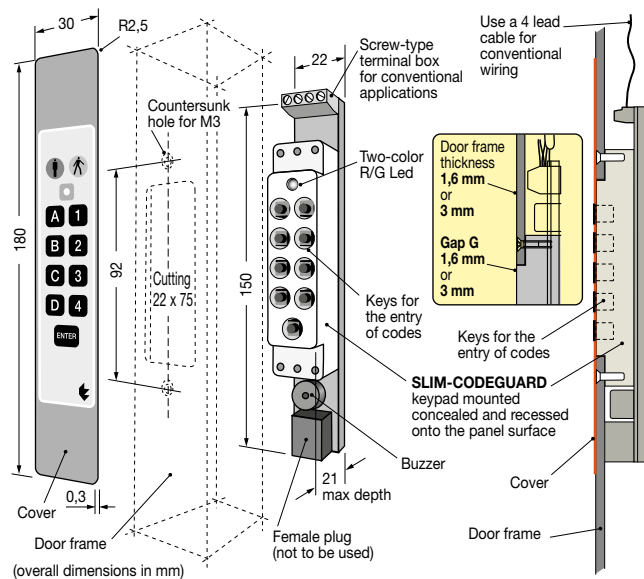


Assembly type ② alignment at bottom with front flange "flush with surface" at bottom

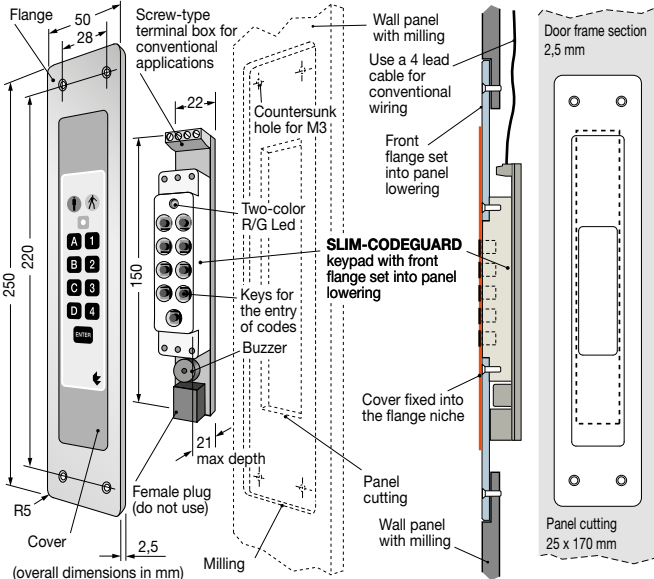


Assembly type ③ traditional fitting with front flange over the lock

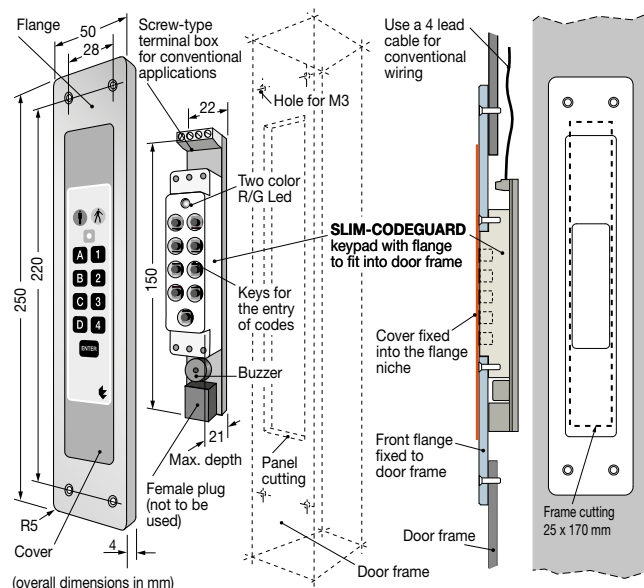

Assembly type ④ for mounting placed on surface using housing

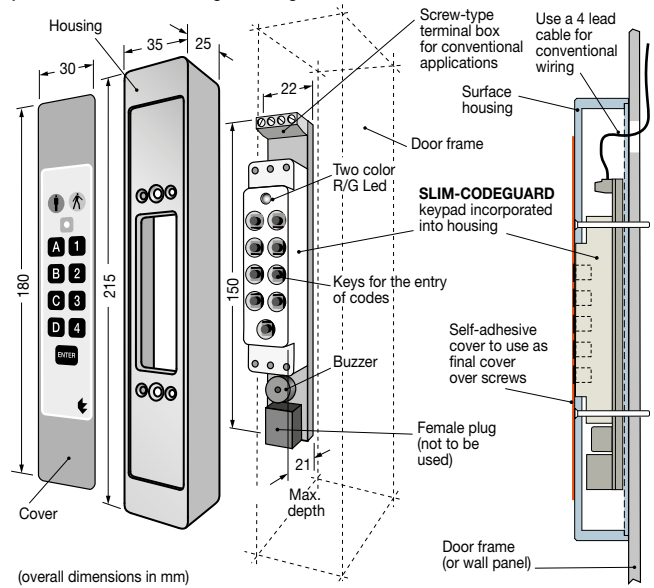

Assembly type ⑤ for recessed wall mounting with flange and wall box

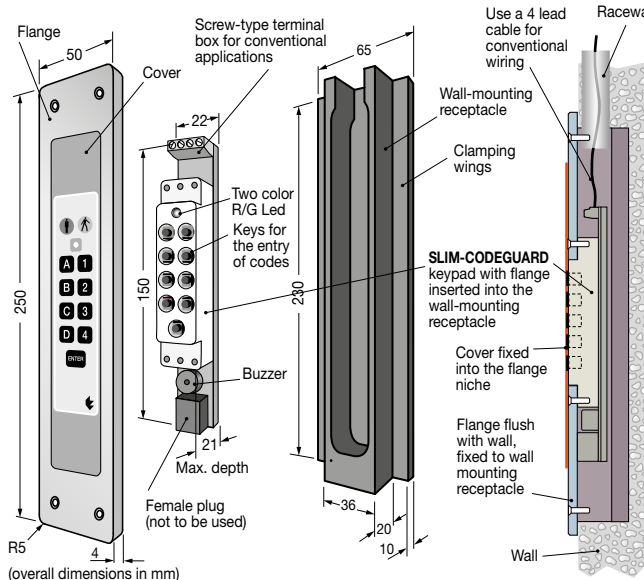

CONNECTION DIAGRAM valid for all 5 types

