

PROFESSIONAL ELECTRICAL DOOR STRIKES

SLIM-DOORSTRIKE

With screw-type terminal box for conventional applications

Export Product-list

January 2018



TECNODIMENSIONE®

Electrical door strike for recess-mounting.
Ideal for ultraslim door frames.

Ordering information




Q.ty

MODELS

N°

SLIM-DOORSTRIKE with mini spring bolt

For conventional mounting

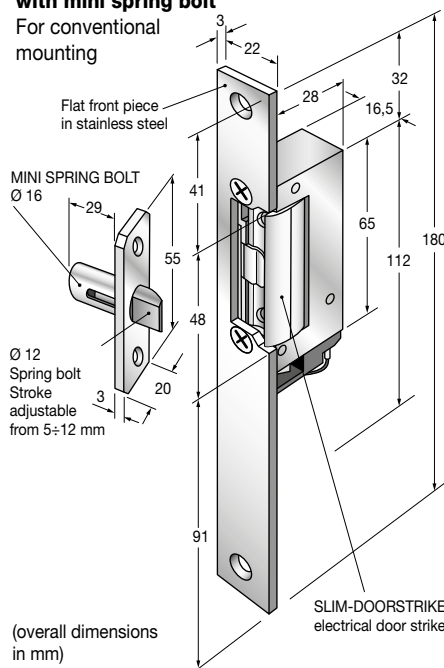

(overall dimensions in mm)

SLIM-DOORSTRIKE electrical door strikes for recess-mounting.

Fail-secure version (security) = powered release.

If there is no power, the **SLIM DOORSTRIKE** closes to prevent unauthorized access.

Fail-safe version (antipanic) = release without power.

If there is a fire in case of power latch, the **SLIM DOORSTRIKE** releases automatically to enable a safe evacuation.

Models for 12 Vdc power supply

SLIM-DOORSTRIKE electrical door strike for conventional mount and screw terminal board for conventional connection to any system, even pre-existent.

Fail-secure version with powered release.

- With 100% ED reel for uninterrupted functioning.
- RR microswitch sensor controlling the door status
- Adjustable counter latch
- 12 Vdc/280 mA power supply

Supplied with flat front plate in stainless steel.

SLIM-DOORSTRIKE fail-safe version (antipanic).

Same as above but releases in event of power latch.

Models for 24Vdc power supply

SLIM-DOORSTRIKE fail-secure version (security).

Same as above but with 24VDC/140 mA power supply.

SLIM-DOORSTRIKE fail-safe version (antipanic).

Same as above but with 24VDC/140 mA of power latch.

Accessory (optional)

Mini spring bolt for recess-mounting with adjustable spring bolt.

Body with recess-mounting flange in anodised machined aluminium with a "silver" finish.

Self-lubricating spring bolt in acetalc resin with stroke adjustable from 5 to 12 mm.

0156J12RM


0158J12RM

0156J14RM


0158J14RM

004910K

EXAMPLE OF RECESS-MOUNTING ON THE DOOR FRAME

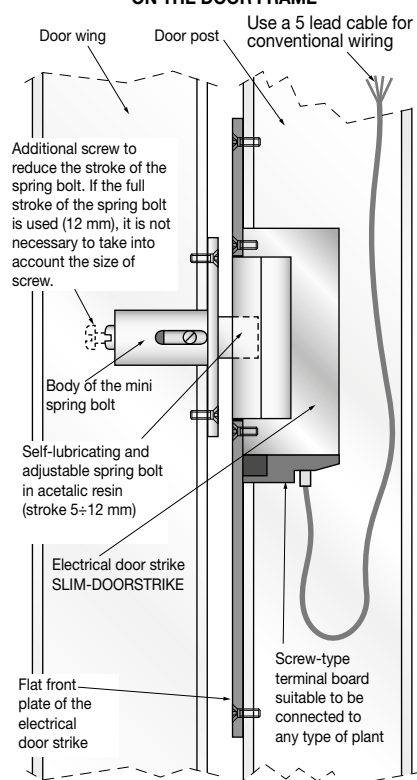

Electrical SLIM-DOORSTRIKE with RR sensor to control the door status and adjustable counter latch

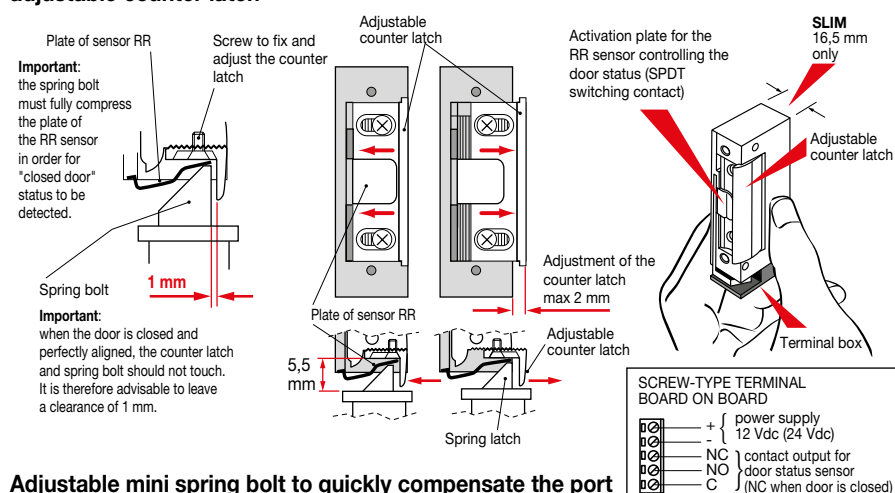

Adjustable mini spring bolt to quickly compensate the port

