

SLIM-MICROREDLOCK

PROFESSIONAL TECNODIMENSIONE ELECTRICAL DROP BOLT

Anti-panic "fail-safe" models (designed to disengage in the event of power failure). With door approaching sensor, flange and reference counterflange. Enables the doors to be closed with a steel bolt head.

One unit... for 4 different needs.


- 1st Immediate installation ZEROTIME = **Click&Go**
- 2nd Ultra-slim and compact design to suit all door frame sections = **SLIM**
- 3rd equipped with Kit SCP to compensate distance between door frame and door-post. Adaptable to any type of frame = **REGOSTRIKE**
- 4th fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**

PERFECT FOR STERILE ROOMS.

**FOR FLUSH
MOUNTING**



1st **Click&Go**

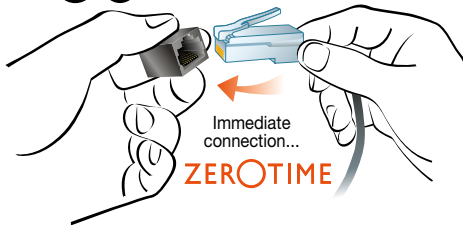


Immediate connection...
ZEROTIME

Insert the plug connector... snap it in place... that's all you need for a perfectly working system...


Click&Go!

2nd
SLIM

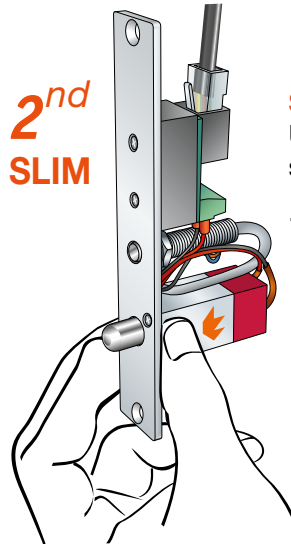

SLIM-MICROREDLOCK
Ultra-slim and compact for very small door frame profiles...
... it's **SLIM!**

3rd
REGOSTRIKE



SLIM-MICROREDLOCK

Adaptable to all types of door frames thanks to kit "SCP", consisting of three bushings that can be interchanged on the counterflange in order to perfectly adjust the distance between door frame and door-post...

... it's **REGOSTRIKE!**


4th
FAIL-SAFE



SLIM-MICROREDLOCK

Automatic fail-safe unlock = bolt "in" without power, bolt "out" when powered. In the event of fire or power failure it automatically unlocks freeing the exit...

... it's **FAIL-SAFE!**

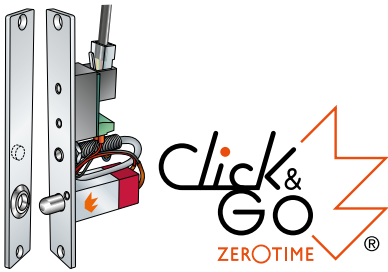

PROFESSIONAL ELECTRICAL DROP BOLTS

SLIM-MICROREDLOCK

With quick fitting 8 pole RJ45 plug to simplify installation and wiring

Export Product-list

January 2018



TECNODIMENSIONE®

Micro electrical drop bolt for recess mounting with flange and counterflange in anodised aluminium with "silver" finish. Ideal for "clean rooms".

Ordering information




Q.ty

MODELS



N°

SLIM-MICROREDLOCK "CLICK & GO"

For recess mounting

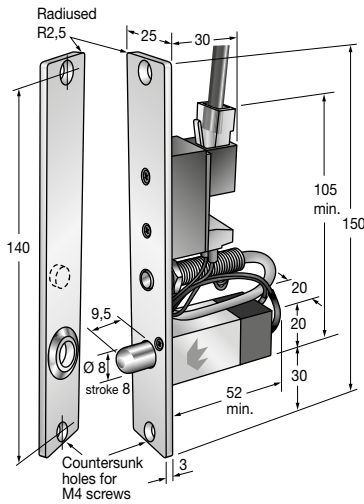

EXAMPLE OF RECESS-MOUNTING ON THE DOOR FRAME

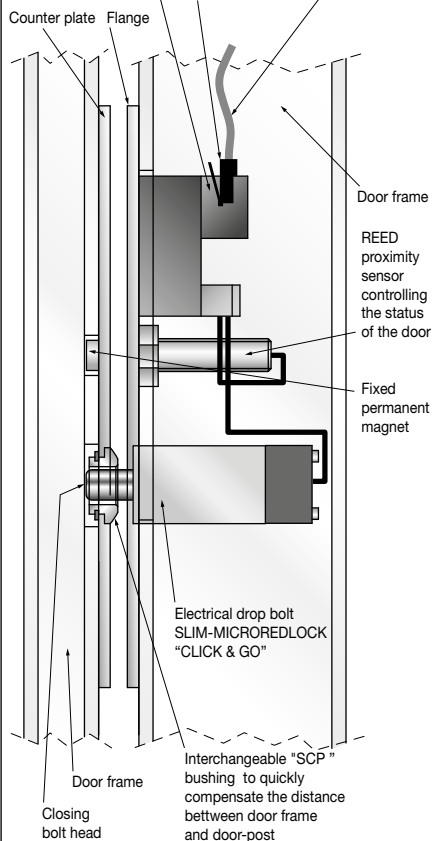

Series REDLOCK (fail safe) "anti-panic" model = The bolt head "projects" when the coil is powered or otherwise "retracted". In the event of fire, the SLIM-MICROREDLOCK electrical drop bolt is automatically released to enable a safe and controlled evacuation.

Models for 12 Vdc power supply

SLIM-MICROREDLOCK fail safe (anti-panic version) electrical drop bolt for recess mounting with "CLICK & GO" technology and 1 quick fitting 8-pole RJ45 female connector for an immediate connection.

- Fail-safe (anti-panic) version with 100% ED coil for uninterrupted functioning.
- Includes a Reed sensor to control the approaching of the door (axially adjustable).
- 12 Vdc/390 mA power supply

Accessories supplied as standard: Counterflange with kit "SCP" that includes 3 bushings in chromium-plated steel to compensate the port.

00803A2FZW

Models for 24Vdc power supply

SLIM-MICROREDLOCK electrical drop bolt for recess mounting with "CLICK & GO" technology, as above, but for 24 Vdc/200 mA power supply.

00803A4FZW

Note:1) The special "SCP" compensation kit is supplied as standard and with 3 interchangeable bushings (choose the most suitable one, as shown in the figure on the side) enables to compensate the port and precisely adjust it. It is in fact important to verify that at least 4/5 of the length of the bolt head on the electrical drop bolt is inserted in the "hole" on the counterflange (reference bushing) when it is projecting (so that the door can be closed).

2) Standard models are designed to be fitted for "horizontal striking". Types for vertical (downwards or upwards) striking, by special request.

WIREX FAST CONNECTING CABLES WITH "CLICK & GO" TECHNOLOGY

Kit "SCP" (Striking Compensation Pipe) kit to quickly compensate distance between door frame and door-post

