



SLIM-DUALUX No-touch PROFESSIONAL SENSORIZED STOP/GO DISPLAYS



- With 2 screw-type terminal box for conventional cables
- Green/red light + buzzer
- Equipped (instead of manual pressure button) with an infrared sensor that "sees" a presence up to 10 cm away. The "contactless" door-opening command and/or alarm works automatically by bringing the hand close, without touching anything.

- On board 1A/12Vdc relay with a dry exit contact (no voltage), programmable NO or NC, using the jumper.
- Timed command with exit relay that starts and remains activated for 8 seconds, each time the hand comes near the No-touch sensor's range of action.
- 1 adhesive cover in polycarbonate, 180x30mm, R2,5, thickness 0.3mm with 7-colour international symbols.

Export Product-list
January 2018



TECNODIMENSIONE®

Ordering information


Q.ty

Models for 12Vdc/70mA power supply

MODELS

N°

Assembly type 1
fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel *



SLIM-DUALUX No-touch stop and go display type 1 with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6mm. Complete with self-adhesive cover designed to be applied after the final installation of the system.


*** In this case, it is advisable to prepare sunk milling during the panel machining phase.**

034981HM2U

Same with diffuser screen and gap G for sections with a thickness of 3mm.

034981HM2U3

Assembly type 2
fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ◆




SLIM-DUALUX No-touch stop and go display type 2 for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out).

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 2.5mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche.

◆ In this case, it is advisable to prepare sunk milling during the panel machining phase.

034982HM2U

Assembly type 3
for conventional flush mounting with front flange overlapping door frame




SLIM-DUALUX No-touch stop and go display type 3 for traditional recessed fitting using flange.

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm for flush mounting. Cover pre-assembled and fixed into the flange niche.

Mounting can be carried out "on site", directly onto the installed door frame.

034983HM2U

Assembly type 4
for surface mounting with using housing



SLIM-DUALUX No-touch stop and go display type 4 for mounting placed on surface using housing.


With extra-strong protective housing, made in anodized silver finish aluminium (35x25x215mm).

Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame

Useful when you wish to avoid recess-mounting or cuts on the door frame.

034984HM2U

Assembly type 5
for recessed wall-mounting with flange and wall-mounting receptacle



SLIM-DUALUX No-touch stop and go display type 5 for recessed assembly using flange and wall box.

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm, to be fixed to the housing by placing on wall surface.

Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche.

Also fitted with wall box with "wings" for rapid anchoring (65x30x230mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display No-touch.


Wall niche and cable channel to be prepared beforehand.

034983HM2U


Special configurations available at extra charge: Cover with your logo and/or customized.

For sizes, measurements and details of chasing, application examples and connection diagrams, see page 17.


Assembly type 1 total alignment, lock recessed into surface without flange

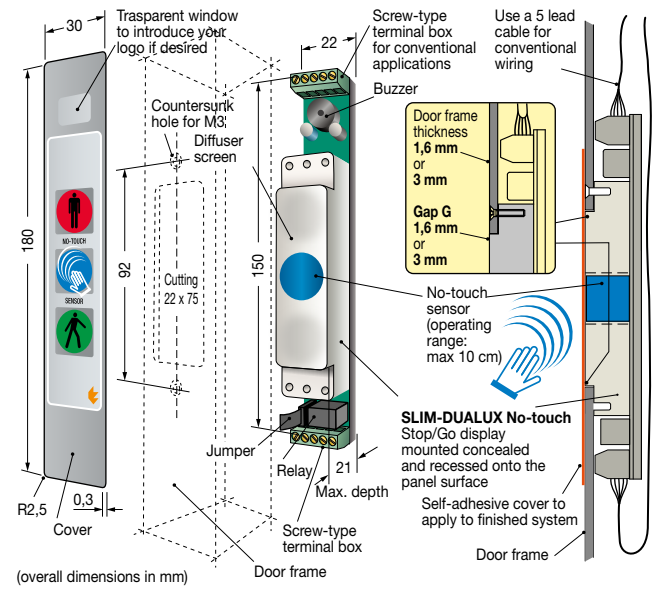


Assembly type 2 alignment at bottom with front flange "flush with surface" at bottom

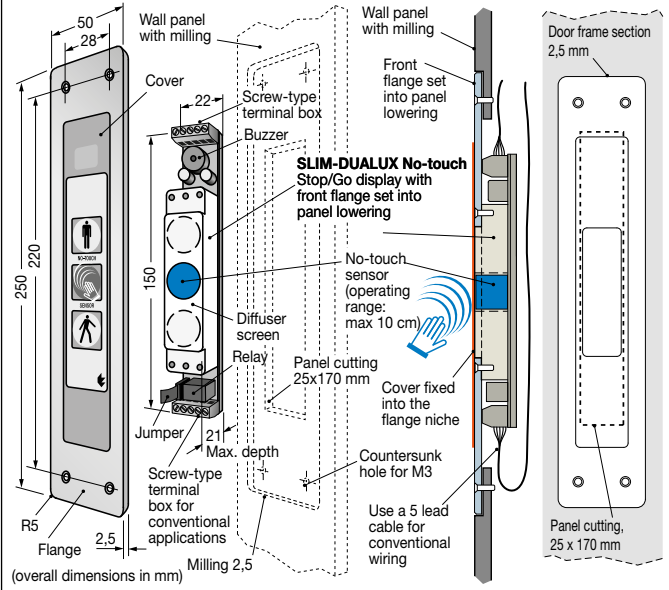


Assembly type 3 traditional fitting with front flange over the lock

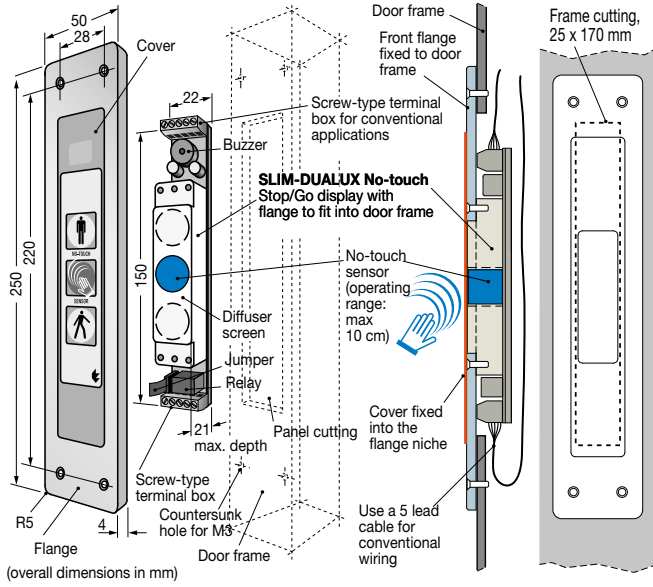

Assembly type 4 for mounting placed on surface using housing

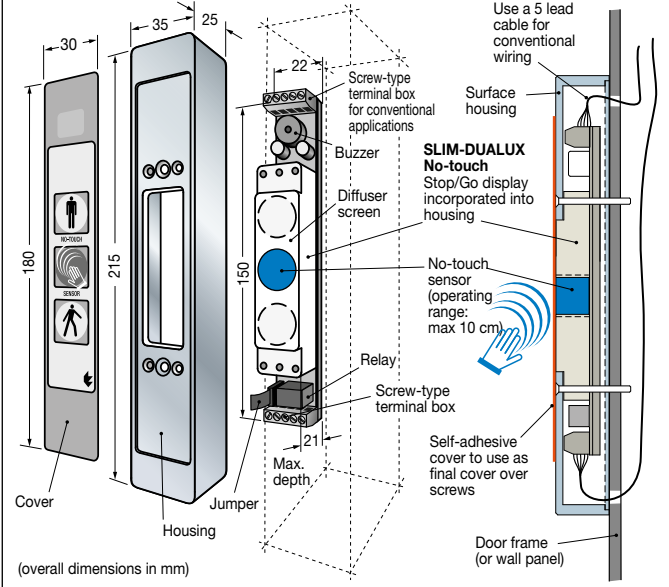

Assembly type 5 for recessed wall mounting with flange and wall box

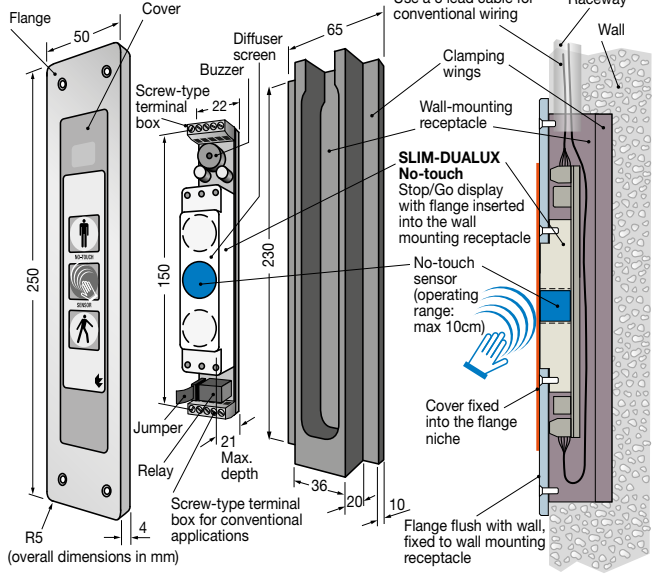

CONNECTION DIAGRAM valid for all 5 types

